

Earth-Rite[®] FIBC

Static Grounding for Type C FIBC bags

The **Earth-Rite FIBC** system verifies the resistance and safe grounding of Type C “Big-Bags” or “Super-Sacks” in combustible or flammable atmospheres. The system ensures that the resistance of the flexible container is within the correct parameters specified by International Hazardous Area Static Control Codes of Practice.

The **Earth-Rite FIBC** can interlock with filling/discharge machinery or control/alarm systems to prevent hazardous levels of static charge accumulation on the bag and the powder or loose solids contained in the bag.



ATEX approved
model shown



The **Earth-Rite FIBC** includes:

- **Corrosion resistant monitoring and indicator panel** with simple GO / NO GO Red/Green LED indicator.
- **Power Supply Unit/I.S. Interface Module** (for safe area installation).
- **ATEX/FM approved FIBC grounding clamp** and retractable Hytrel[®] cable.




The **Earth-Rite FIBC** system is offered in two formats which monitor resistance either between the lifting hooks and the grounding clamp, or between two separate grounding clamps situated at opposite ends of the bag.

3 easy steps to secure grounding of Type C FIBC bags.

1. Attach the grounding clamp to the designated grounding point or tab on the FIBC bag.
2. For systems employing the use of two clamps, attach the 2nd clamp to the opposite end of the bag, ensuring resistance through the whole bag is monitored.
3. When the bag parameters are measured and the bag is fully grounded, the system indicator will switch from red to green.

Note: If the **Earth-Rite FIBC** indicator does not switch to green, check that the grounding clamp is correctly attached to the grounding point of the bag. If the system does not go permissive, the FIBC bag will be outside the correct Type C parameters of resistance defined under CLC/TR:50404 and should not be used for filling or emptying within the hazardous area.

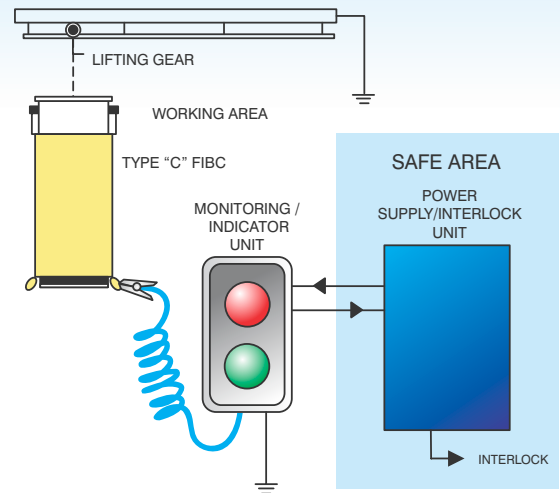

Additional Applications

Along with grounding Type C FIBC bags, the **Earth-Rite FIBC** can be used to monitor and ground a range of non-metal containers including plastic drums, liners and kegs that are specified as static dissipative.

<p>ATEX Certification: Earth Monitoring Unit complete with earth status indicator LEDs II 1 GD EEx ia IIC T4 Power supply unit complete with Intrinsically Safe Interlock contact II (1) GD [Eex ia] IIC</p> <p>FM Approved: Class I, Div 1 Groups A B C D Class II, Div 1 Groups E F G Class III.</p>	<p>Options</p> <p>Grounding Clamp/Cable assembly (for 2-clamp installations)</p> <p>Hazardous Area Power Supply Enclosure</p> <p>IEC/ATEX (European) and NEC (North American) versions available</p> <p>Ingress Protection IP 65 / Nema 4X</p> <p>Power Supply 110/120V or 220/240V AC, 50-60 Hz</p>	
<p>Ordering Code</p> <p>EMUF01 EMUF01/110 EMUF02 EMUF02/110 EMUF01U EMUF01U/230</p>	<p>Product Description</p> <p>Earth-Rite FIBC System (EEx ia IIC T4) * 220/240 Vac Earth-Rite FIBC System (EEx ia IIC T4) * 110/120 Vac Earth-Rite FIBC System (EEx ia IIC T4) Power Supply Unit: EEx d IIB T5 * 220/240 Vac Earth-Rite FIBC System (EEx ia IIC T4) Power Supply Unit: EEx d IIB T5 * 110/120 Vac Earth-Rite FIBC System (FM Approved) * 110/120 Vac Earth-Rite FIBC System (FM Approved) * 220/240Vac * supplied with 5m (16ft) Cen-Stat Hytrel single conductor monitoring spiral cable standard</p>	<p>Approvals</p> <p>ATEX ATEX ATEX ATEX FM FM</p>

For ordering codes and more detailed technical information please refer to product specification sheet.

The Earth-Rite FIBC forms part of the Earth-Rite range of Static Grounding and Bonding Equipment available from Newson Gale



Leading the way in hazardous area static control

www.newson-gale.com

Newson Gale Inc
460 Faraday Avenue
Unit B, Suite 1
Jackson, NJ 08527
USA
Tel: +1 732 961 7610
Fax: +1 732 791 2182

Email: groundit@newson-gale.com

Newson Gale Ltd
Omega House
Private Road 8
Colwick, Nottingham
NG4 2JX, UK
Tel: +44 (0)115 940 7500
Fax: +44 (0)115 940 7501

Email: groundit@newson-gale.co.uk