

OWNER'S (OPERATOR'S) MANUAL AND SAFETY INSTRUCTION
FOR
KITO SHORT HEADROOM TYPE
< MANUAL CHAIN HOIST >




Original Instruction



This owner's (operator's) manual and safety instruction describes special steps to be taken with the Short Headroom Type Chain Hoist. Prior to use, make sure to read both the "Short Headroom type" and the "Standard CB Series Manual Chain Hoist" instruction manuals carefully.

1. NAME OF EACH PART

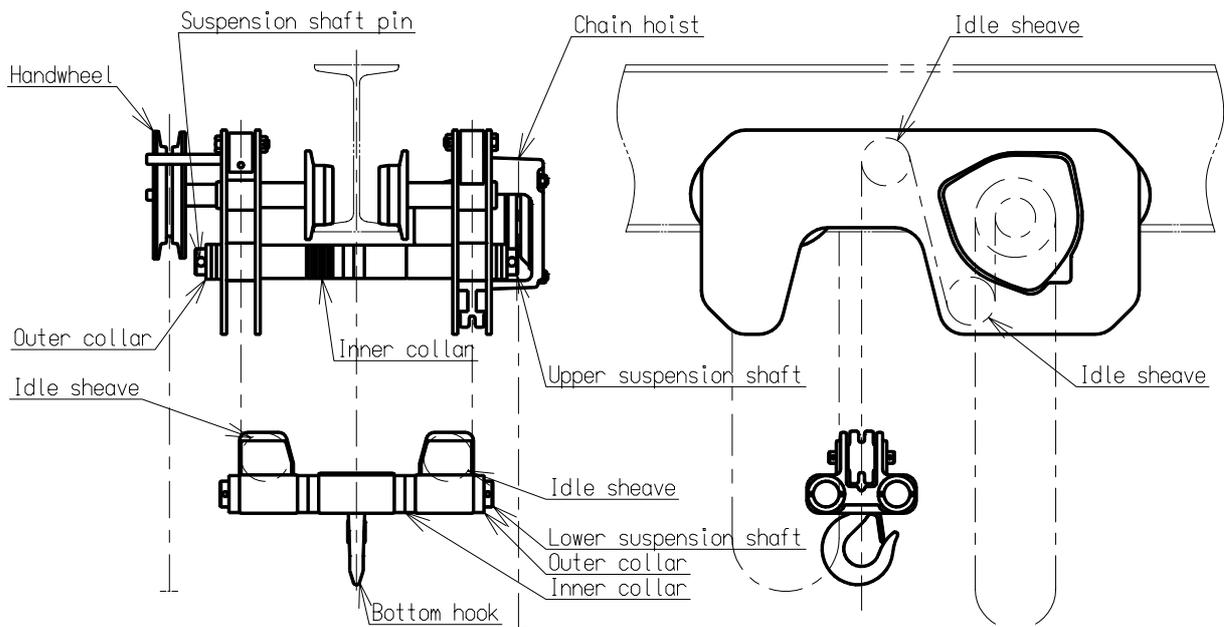

- At the time of delivery, confirm that the product conforms to the ordered specifications.
- The above drawing shows the basic model of a short headroom type chain hoist. As each product is designed to order, yours may differ in actual details from the above drawing.

2. SPECIFICATIONS

Code	WLL (t)	Std. Lift (m)	Chain pull to lift full load (N)	Net weight (kg)
SHB005	0.5	2.5	157	65
SHB010	1	2.5	314	65
SHB020	2	3	284	110
SHB030	3	3	363	155
SHB050	5	3	441	275
SHB075	7.5	3.5	450	370
SHB100	10	3.5	470	370

3. INSTALLATION




- Always make sure on mounting that the chain is properly engaged with the idle sheave and is free of twisting, slack, etc.

3-1 ADJUSTING BEAM WIDTH

Beam width of the geared trolley, prior to delivery, is set to the maximum value for the product (EX:125mm for 1ton). In order to change it into H-beam width, adjustment of the suspension shaft, spacers, etc. is necessary. Perform the adjustment as follows:

Adjustment of upper and lower suspension shafts

The upper and lower suspension shafts are adjusted, by placing spacers according to the table of spacer shown in the end of this document, as shown in the following positions.

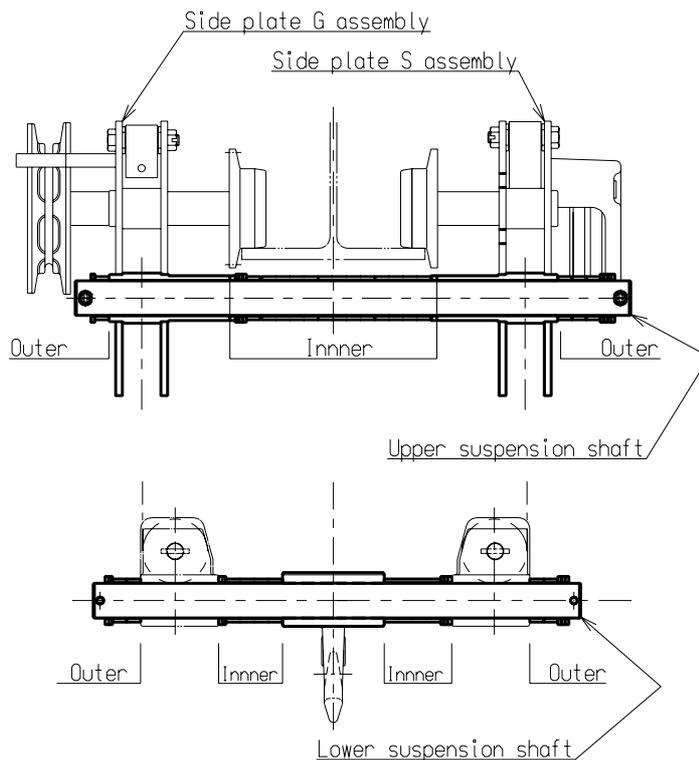


3-2 MOUNTING TROLLEY ON RAIL

- There are two ways for mounting the trolley on the travelling rail in accordance with location of the travelling rail installation in the building.

1) Mounting from the rail end

- After setting to the appropriate beam width of the trolley, remove the rail end stopper and mount the assembled trolley from the rail end as in the following drawing.

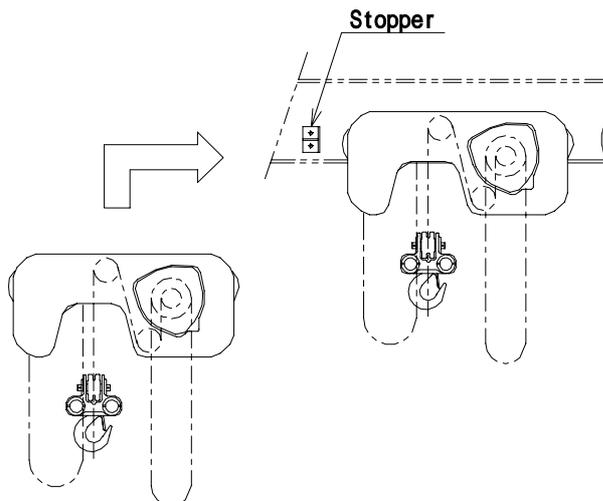


- Be sure to replace the detached stopper.

2) Mounting by disassembling the main body

- When there is no space between the rail end and the building, remove the frame on the chain hoist side and, after placing the opposite side frame on the travelling surface, perform reassembly.

(NOTE :See “2-1.ADJUSTING BEAM WIDTH” .)

- Be sure to firmly support the parts during reassembly from the bottom side so that the handwheel side is not tilted or otherwise shifted.
- On completion of reassembly, be sure to confirm that various shafts, nuts, lock pins and split pins are properly fastened without any slack and have not been loosened.

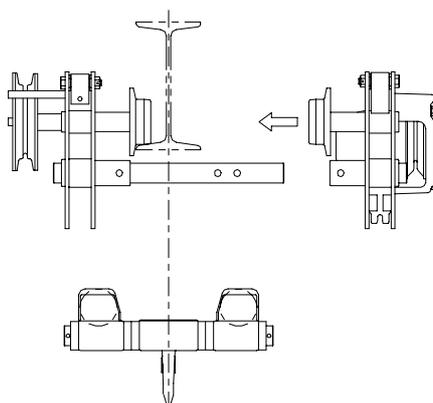


3-3 MOUNTING STOPPER

- Always make sure to mount the stopper to prevent dropping of the trolley at the rail end.
- Fabricate the stopper based on the following table and drawing, and determine the position for its' mounting according to wheel size,


RAIL WIDTH	MATERIAL SIZE	E	F	Q'ty	BOLT, NUT
75	L-50 × 50 × 6	30	40	4	M12 × 55 × 55 (× 4) NUT M12 (× 8)
100					
125					
150	L-65 × 65 × 8	35	65	4	
175	L-75 × 75 × 9	40	75	4	

Use the double nut to tightly fasten the bolts.

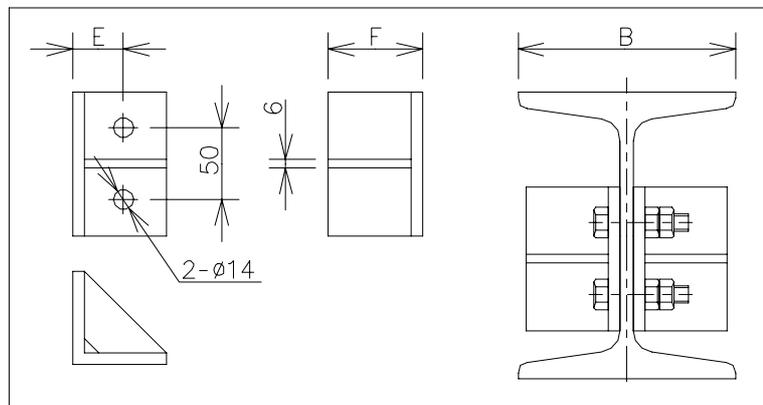

3-4 MOUNTING CHAIN CONTAINER (OPTIONAL)

- Mount the chain container according to the following procedure. (See the drawing below:)
- 1) Fix the container sling fitting to the chain container by using the container sling fitting bolt B.
- 2) Fix the chain container assembly to the frame by using the container sling fitting bolt A and collar.

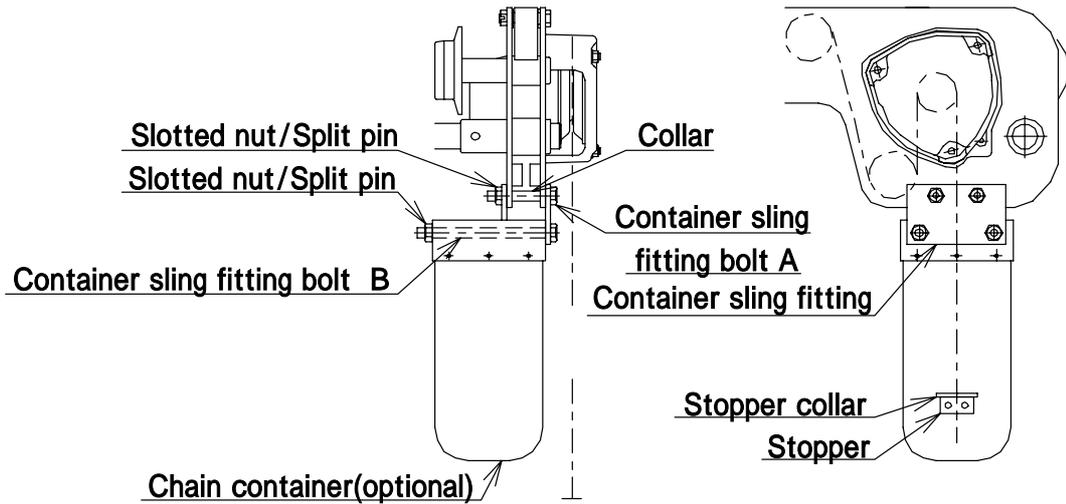

⚠ WARNING

- Always confirm that all the slotted nuts and split pins are properly fixed.
- Always confirm that the stopper and the collar are firmly fixed on the third link from the end of the chain on the unloaded side and also that the stopper and collar are free of slack.
- Put a load chain from its no-load side end slowly and in such a manner that the chain does not get tangled up.
- Do not put a whole load chain in the bucket at one time.

4. SAFETY INSTRUCTIONS

4-1 PRE-START INSPECTION

⚠ WARNING Daily inspection is a MUST for safety purposes. Always perform a daily inspection before starting operation.

Checking Items

- Does the unloaded trolley travel smoothly without any load?
- Is travel free of jolts?
- Is the frame free of any visible deformation?
- Is the traveling rail free of any deformation /damage?

Always refer to the “Standard CB Series Manual Chain Hoist” instruction manual for pre-start inspection procedures for the hoisting unit.

⚠ WARNING

- Never use a hoist under abnormal condition.
- Always stop operation immediately on detection of any abnormality, and either repair or replace the damaged part with the appropriate product without delay.

4-2. PRECAUTIONS FOR SAFE OPERATION

⚠ WARNING

- Always apply sufficient oil to the load chain and idle sheaves.
- Always perform a daily inspection of the load chain and idle sheaves. Upon detecting wear, etc., replace parts immediately. A worn load chain is dangerous and can cause breakage.
- Never lift a load aslant. Always move the trolley to the position directly above the load to be lifted so that it can be lifted vertically.
- Never allow the trolley to hit the stopper.
- When two or more trolleys are installed on the same rail, never bring them into contact and hit with each other.
- Never hitch the hand chain of a geared trolley into any other machine.
- Always operate travelling the trolley from a position to the rear of the load.